



agspray.com

LIQUID APPLICATORS



agspray.com

LA5000

W/ 27', 30', 35' Or 40' Toolbar

- 1050 Gallon Tank
- 27', 30', 35' Or 40' Toolbar
- Adjustable Constant Wing Down Pressure
- Auto Gull Wing
- 100% Tank Drainability In Nearly Every Terrain
- Front Mount Toolbar For Superior Trailing
- Wide Parallel Linkage For Better Stability
- Heavy Duty 7 X 7 Toolbar
- 35' & 40' Bars Fold To 27' - 11 Coulters
- Tool Bar Gauge Wheels Standard
- 320/85R38 Tires
- 8-Bolt Hubs Standard
- Adjustable Axle Spacing On Single (62"-88"; 112"-152")
- Optional Wheel Drive Piston Or Hydraulic Drive Centrifugal Pump



FOLDED VIEW



Auto Gull Wing function allows the wings of the bar to automatically tilt up when main bar is raised for greater turning clearance.

- Ensures the outer coulters never contact the ground while turning.
- When the main bar is raised it automatically tips the wings up.
- Reduced crop damage while turning on ends.
- Double cylinder allows the "Gull" wing and main lift to be controlled with one hydraulic remote.



20" Coulters With HD Down Pressure Spring

- Option of Stainless Steel Stream Injection or Placement Knife



Easy Access Rear Mounted Plumbing

- 2" Quick Fill
- Flow Back Electric Valves allow quick shutoff time
- Clean water hand wash valve



Hydraulic Drive Pump with PWM Valve

- 210 GPM Hydraulic Pump with PWM motor standard
 - Wider range of flow capacity
 - Eliminates run dry
 - Faster response time
 - Limits over speeding of motor
- Compatible with all ISO systems



Hydraulic Control Module

- Adjustable constant down pressure on wings to ensure consistent coulters depth



agspray.com

LA7000

W/ 27', 30', 35' Or 40' Toolbar

- 1350 Gallon Tank
- 27', 30', 35' Or 40' Toolbar
- Adjustable Constant Wing Down Pressure
- Auto Gull Wing
- 100% Tank Drainability In Nearly Every Terrain
- Front Mount Toolbar For Superior Trailing
- Wide Parallel Linkage For Better Stability
- Heavy Duty 7 X 7 Toolbar
- 35' & 40' Bars Fold To 27' - 11 Coulters
- Tool Bar Gauge Wheels Standard
- 320/90R46 Tires
- 10-Bolt Hubs Standard
- Adjustable Axle Spacing On Single (60"-88"; 112"-152") Or Dual Option Available
- Optional Wheel Drive Piston Or Hydraulic Drive Centrifugal Pump



FOLDED VIEW



The LA7000's gullwing feature tips the wings 7° for greater clearance.



Double Cylinder Allows The Gullwing & Main Lift To Be Controlled With One Hydraulic Remote

- 2" Quick Fill
- Flow Back Electric Valves allow quick shutoff time
- Clean Water Hand wash valve



Close coupled machine, 139" hitch pin to axle

- Better trailing around terraces and tracking on side hills.



20" Coulters With HD Down Pressure Spring

- Option of Stainless Steel Stream Injection or Placement Knife



Easy Access Rear Mounted Plumbing

- 2" Quick Fill
- Flow Back Electric Valves allow quick shutoff time
- Clean Water Hand wash valve



Ground Drive Press Wheel

- 7055 or 9055 Piston Pump
- Steel Drive Wheel Eliminates slippage in wet conditions
- Wheel to Wheel Drive maintains constant contact through all terrain



Hydraulic Control Module

- Adjustable constant down pressure on wings to ensure consistent coulters depth



agspray.com

LA9000

W/ 27', 30', 35', 40' Or 55' Toolbar

- 1650 Or 1950 Gallon Units
- 27', 30', 35', 40' Or 55' Toolbars
- Adjustable Constant Wing Down Pressure
- Auto Gull Wing
- 100% Tank Drainability In Nearly Every Terrain
- Front Mount Toolbar For Superior Trailing
- Double Toolbar 4 X 6 With Large 2.25" Pins & Bushings
- Wide Parallel Linkage For Better Stability
- 35 Foot + Units Have Self-Locking Outer Wing Hinges
- 35' & 40' Bars Fold To 27' - 11 Coulters
- 55' Folds Up To 35' - 15 Coulters
- Tool Bar Gauge Wheels Standard
- 380/90R54 Standard Tires, Various Options Available
- 10-Bolt Hubs Standard
- Adjustable Axle Spacing On Single (60"-88"; 112"-152") Or Dual Option Available
- Optional Wheel Drive Piston Or Hydraulic Drive Centrifugal Pump



FOLDED VIEW



7 Degree Gullwing Feature Guarantees A Minimum 66" Toolbar Height For Greater Turning Crop Clearance



Easy Access Rear Mounted Plumbing

- 2" Quick Fill
- Flow Back Electric Valves allow quick shutoff time
- Clean Water Hand wash valve



Close Coupled Machine, 175" Hitch Pin To Axle

- Better trailing around terraces and tracking on side hills.



Hypro Stainless Steel Pump With Silicon Carbide Seal & PWM Valve

- 210 GPM Hydraulic Pump
 - Wider range of flow capacity
 - Eliminates run dry
 - Limits over speeding of motor
 - Faster response time
- Compatible with all ISO systems



Heavy Duty Coulters

- 430 LBS Down Pressure Springs
- 20" Crucible Blade
- Can Be used with Injector Nozzle or Knife
- Stainless Steel Trash Guard Feed Tube



agspray.com

LA3PT

W/ 27', 30', 35', 40' Or 55' Toolbar

- LA Series 3 Point Toolbar with Para-Arm Height Control
- CAT 2/3N/3/4N Quick-Hitch Compatible
- Adjustable Toolbar Gauge Wheel Set (2 sets on 55')
- Heavy Duty 7 X 7 Toolbar on 27', 30', 35' & 40'
 - 12' Center Section
- 55' - 24 Row (23 coulters) Heavy Duty Double 4 X 6 Toolbar
 - 18' Center Section
- Adjustable Wing Down Pressure To Maintain Uniform Coulters Depth
- Single Raise/Lower-Auto Gull Wing Control Function (Bar Lift & Gull Wing Feature all Done with 1 Hydraulic Switch)
- Auto Gull Wing Feature Tips the Wings Up for Better Turning Clearances
- Optional Implement Hitch For Trailing Nurse Applications
- Powder Coat Paint



FOLDED VIEW



Crop Clearance

Designed to extend the application window, the LA 3PT has 7 degree gullwing tip feature for greater turning crop clearance. The Para-Link system has 32" of additional toolbar height adjustment.

Self-Propelled Applicator

Utilize tractor mounted tanks to side dress nutrients. The Para-Arm Link system moves the Toolbar back for better operator visibility.



3 Point Para-Arm Link System

The Para-Arm design allows the operator to set the 3 point height and use one hydraulic remote to raise the toolbar and activate the GullWing Tip when turning around. Resulting in greater crop clearance.



Strip-Till Application

Optimize fertilizer with the LA 3PT which can be equipped with Strip-Till Row Units. Precision placement of fertilizer for better return on fertilizer investment.


LA5000

W/ 27', 30', 35' Or 40' Toolbar



agspray.com

Technical Specifications	LA5000 Series
Tractor Requirements (Minimum)	160 HP –1050 Gallon
Transport Height 35' ToolBar With 320/85R38 Tires	159"
Transport Width With Coulters On	200"
Tank	1050 Gallons
Tank Type	AG Spray Teardrop Total Drain Tank
Filling	2" Quick Fill
Personal Fresh Water	7.5 US Gallons
Hitch to Axle Length	139"
Hitch Pin Size Required	1 1/4"
Hub Rating, Tire	8-Bolt Hub <ul style="list-style-type: none">• 7,500 lb. Narrow adj. Axle<ul style="list-style-type: none">- 62", 72", 80", 88"- Available with 320/85R38• 7,500 lb. Wide adj. Axle<ul style="list-style-type: none">- 112", 120", 132", 144", 152"- Available with 320/85R38
Pump	Hydraulic PWM- 207 GPM - 130 PSI Max Output, LifeGuard Seal Wheel to Wheel Ground Drive - NGP-7055 34 GPM - NGP-9055 68 GPM
Toolbar Size	27', 30, 35' or 40'
Toolbar Lowered Crop Clearance	34"
Toolbar Raised Crop Clearance	66" plus 7 degree Auto-GullWing Tip

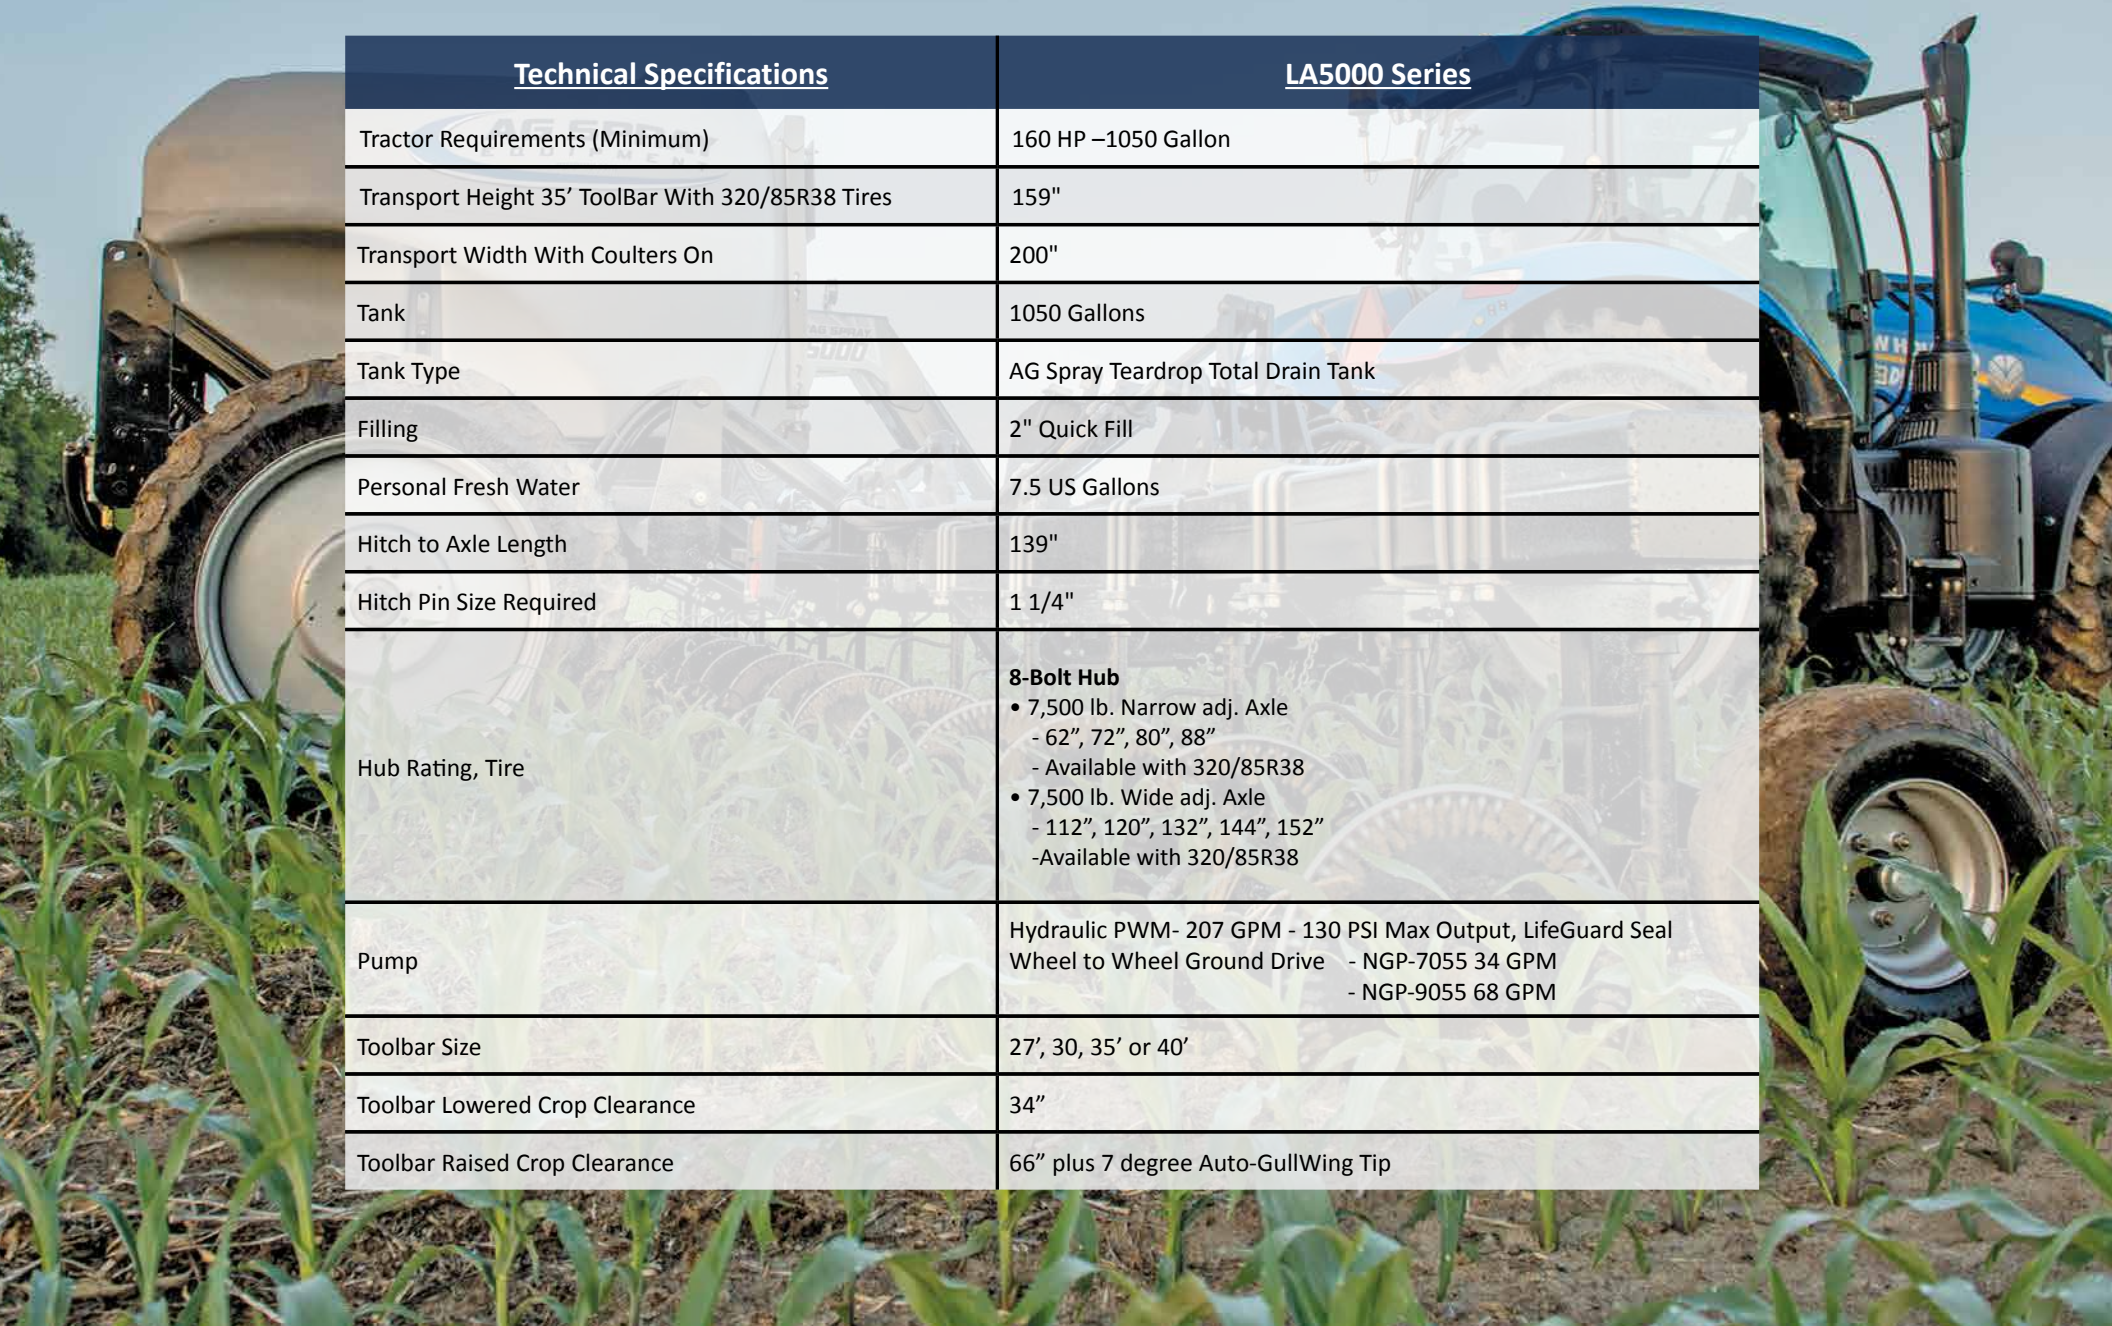



agspray.com

LA7000

W/ 27', 30', 35' Or 40' Toolbar

Technical Specifications	LA7000 Series
Tractor Requirements (Minimum)	200 HP –1350 Gallon
Transport Height 35' ToolBar With 320/85R46 Tires	N/A
Transport Width With Coulters On	200"
Tank	1350 Gallons
Tank Type	AG Spray Teardrop Total Drain Tank
Filling	2" Quick Fill
Personal Fresh Water	7.5 US Gallons
Hitch to Axle Length	162"
Hitch Pin Size Required	1 1/2"
Hub Rating, Tire	10-Bolt Hub <ul style="list-style-type: none"> • 15,000 lb. Narrow adj. Axle <ul style="list-style-type: none"> - 60", 72", 80", 88" - Available with 320/90R46 or 380/90R46 or 320/105R105 (specialty) Tires • 15,000 lb. Wide adj. Axle <ul style="list-style-type: none"> - 112", 120", 132", 144", 152" - Available with 320/90R46 or 380/90R46 or 320/105R105 (specialty) Tires • 20,000 lb. Dual Axle <ul style="list-style-type: none"> - *60"/120" Track (*Others Wheel Tracks Available) - 320/90R46 Tires
Pump	Hydraulic PWM- 210 GPM - 130 PSI Max Output, LifeGuard Seal Wheel to Wheel Ground Drive - NGP-7055 34 GPM - NGP-9055 68 GPM
Toolbar Size	27', 30, 35' or 40'
Toolbar Lowered Crop Clearance	34"
Toolbar Raised Crop Clearance	66" plus 7 degree Auto-GullWing Tip

LA9000

W/ 27', 30', 35', 40' Or 55' Toolbar



agspray.com

Technical Specifications	LA9000 Series
Tractor Requirements (Minimum)	250 HP –1650 Gallon 300 HP– 1950 Gallon
Transport Width With Coulters On	200"
Tank	1650 Gallons 1950 Gallon
Tank Type	AG Spray Teardrop Total Drain Tank
Filling	3" Quick Fill
Personal Fresh Water	7.5 US Gallons
Hitch to Axle Length	175"
Hitch Pin Size Required	1 1/2"
Hub Rating, Tire	10-Bolt Hub <ul style="list-style-type: none">• 20,000 lb. Narrow adj. Axle<ul style="list-style-type: none">- 60", 72", 80", 88"- Available with 380/90R54 or 480/80R42 Tires• 15,000 lb. Wide adj. Axle<ul style="list-style-type: none">- 112", 120", 132", 144", 152"- Available with 380/90R54 or 480/80R42 Tires• 20,000 lb. Dual Axle<ul style="list-style-type: none">- 60/120", 76/152", 80/160", 88/132" Track- Available with 320/90R54, 380/90R54 Tires
Pump	Hydraulic PWM - 207 GPM - 130 PSI Max Output, LifeGuard Seal Wheel to Wheel Ground Drive - NGP-7055 34 GPM - NGP-9055 68 GPM
Toolbar Size	27', 30, 35', 40' or 55'
Toolbar Lowered Crop Clearance	34"
Toolbar Raised Crop Clearance	66" plus 7 degree Auto-GullWing Tip